



# R | Forest 20 mil PRODUCT SPECIFICATIONS

<b>STYLE NAME</b>	FOREST
<b>STYLE NUMBER</b>	I511V
<b>CONSTRUCTION</b>	LVT
<b>WEAR LAYER THICKNESS</b>	20 mil (.020 inches / .5 mm)
<b>OVERALL THICKNESS</b>	0.098 inches (2.5 mm)
<b>REFERENCE SPECIFICATION</b>	Class III printed film vinyl plank
ASTM F 1700	Type B (embossed)
<b>FINISH</b>	ExoGuard+™
<b>INSTALLATION</b>	Glue Down
<b>RECOMMENDED ADHESIVE</b>	Shaw 4100 or S150

## Packaging

<b>PLANK SIZE</b>	5.96 in W x 48 in L
<b>PIECES /BOX</b>	21
<b>SQ FT /BOX</b>	41.72

## Performance Testing

<b>STATIC LOAD / ASTM F 970</b>	Modified* – 1500 psi (lbs/sq in)
<b>RESISTANCE TO INDENTATION / ASTM 1914</b>	Passes
<b>RESISTANCE TO CHEMICALS / ASTM F925</b>	Passes
<b>RADIANT FLUX / ASTM E 648</b>	Class I
<b>SMOKE DENSITY / ASTM E 662</b>	<450


\*Results are based on a laboratory test and used for comparative purposes. Real life load limit may vary.

## Warranty

15 Year Limited Commercial Warranty. Underbed Warranty Available.

Please visit [patcraft.com](http://patcraft.com) for the most current warranty information.

## Installation Methods

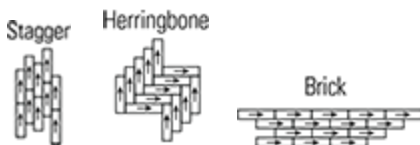

## Environmental

**INDOOR AIR QUALITY**

FloorScore® Certified